


# K08-ES

F-Slide

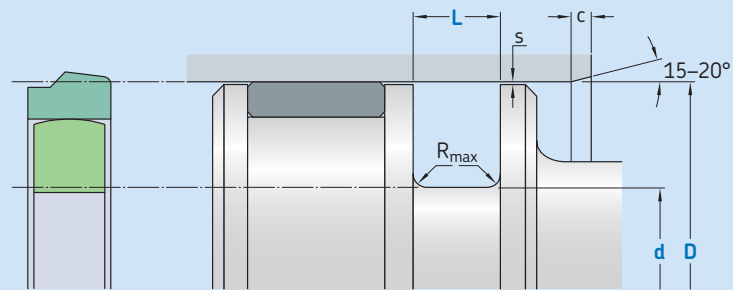

Ordering dimensions in **blue**

Surface roughness	$R_{tmax}$	$R_a$
<b>Sliding surface</b>	$\leq 2 \mu m$	$0,05-0,2 \mu m$
<b>Bottom of groove</b>	$\leq 6,3 \mu m$	$\leq 1,6 \mu m$
<b>Groove face</b>	$\leq 15 \mu m$	$\leq 3 \mu m$

Bearing area: 50–95% and a cutting depth of  $0,5 R_z$ , based on  $C_{ref} = 0\%$

Standard dimensions						Maximal radial extrusion gap			
D	H9	d	L	$R_{max}$	c	$s^*$			
over	incl.	h10	+ 0,2	$\mu m$		100 bar	200 bar	400 bar	600 bar
mm						mm			
<b>15</b>	<b>50</b>	D - 10	5,0	0,3	4,0	0,40	0,30	0,20	0,10
<b>50</b>	<b>60</b>	D - 15	7,5	0,4	5,0	0,50	0,30	0,20	0,10
<b>60</b>	<b>200</b>	D - 20	10,0	0,4	6,0	0,60	0,40	0,25	0,15
<b>200</b>	<b>300</b>	D - 25	12,5	0,4	8,5	0,60	0,40	0,25	0,15
<b>300</b>	<b>530</b>	D - 30	15,0	0,8	10,0	0,70	0,50	0,30	0,20
<b>530</b>	<b>680</b>	D - 35	17,5	1,2	13,0	0,80	0,60	0,50	0,20
<b>680</b>	<b>1 500</b>	D - 40	20,0	1,2	15,0	1,00	0,70	0,60	0,30

\* The extrusion gap referred to is valid up to 80 °C and valid for the side opposite to the pressure side; higher temperatures require lower values.

## Ordering example

Profile  
D x d x L [mm]  
Sealing material / Energizer

F-Slide K08-ES  
100 x 80 x 10  
SKF Ecoflon 3 / SKF Ecorubber-1

## Operating parameters

Material Seal	Energizer	Temperature		Speed <sup>1)</sup>	Pressure <sup>2)</sup>
		from	to	max	max
		°C		m/s	bar (MPa)
–					
■ SKF Ecoflon 2	■ SKF Ecorubber-1	–30	+100	10	600 (60)
■ SKF Ecoflon 3					
■ SKF Ecoflon 4	■ SKF Ecorubber-2	–20	+200		

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

<sup>1)</sup> Surface speed limit values are valid only in the presence of a lubrication film.

<sup>2)</sup> Pressure ratings depend on the size of the extrusion gap.