

# Telescopic pillar

Telesmart TMD

## Benefits



- Powerful and fast lifting
- Aesthetic design
- Efficient retracted length ratio




## Standards

- EN 60335
- UL 60950




Suitable control units and accessories

Control units	
	LD 014 LD 015
TMD	● ●
 LD-034.000.004	● ●
 LD-011.031.000	● ●

 Hand switch  
 Foot switch  
 Desk switch

TMD can only be operated with LD control units.

Dimensional drawing

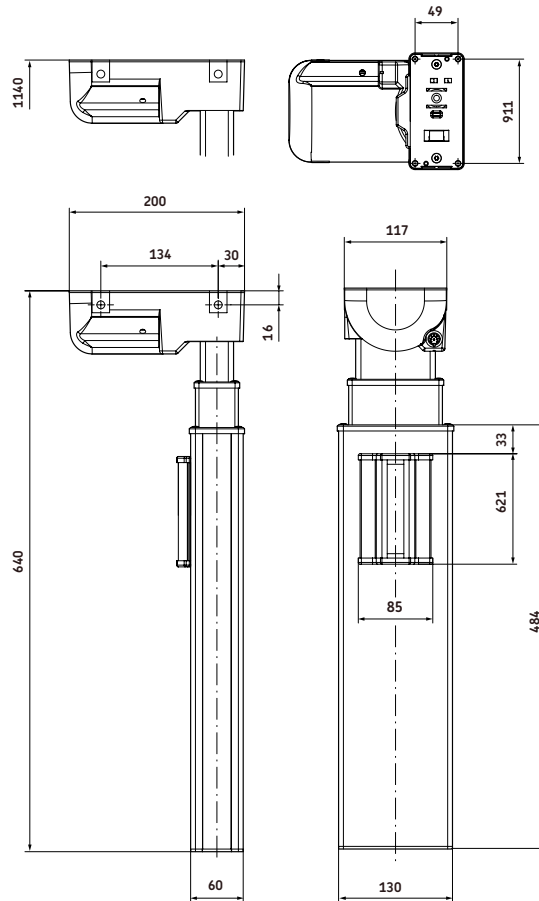


Legend:  
S = stroke  
L = retracted length

Technical data


	Unit	TMD
Rated push load	N	800
Rated pull load	N	0
Bending load	Nm	up to 120*
Speed (full load to no load)	mm/s	35 to 60
Telescopic pillar version	# of section	3-section
Stroke	mm	700
Retracted length	mm	550
Voltage	V DC	24
Power	W	168
Current	A	7
Duty cycle: intermittent operation	min.	1 min./9 min.
Duty cycle: short-time operation	min.	N/A
Ambient temperature	°C	+5 to +40
Type of protection	IP	20
Protection class	–	SELV
Type of control	–	electrical
Weight	kg	8,5

\* For details, please see bending load diagrams


Performance diagrams

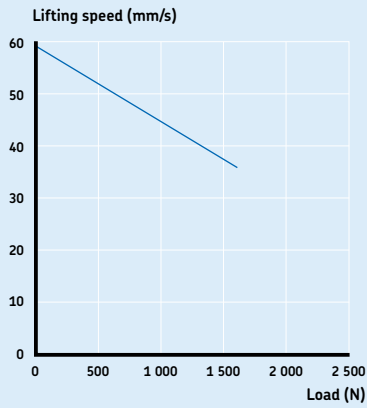


Lifting speed 2-channel control

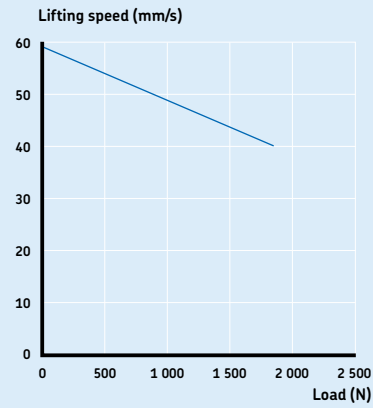

Lifting speed 3-channel control

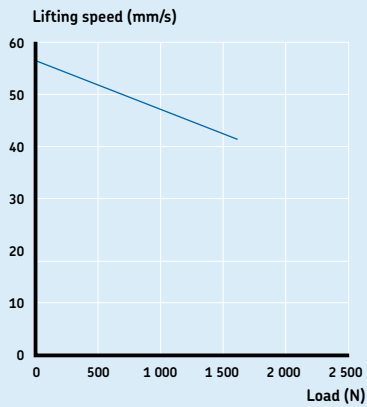


Lifting speed 4-channel control

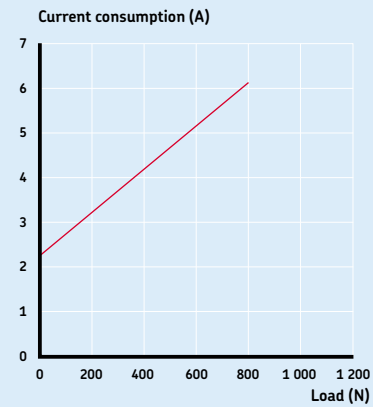


Current-load diagram

Bending load diagrams

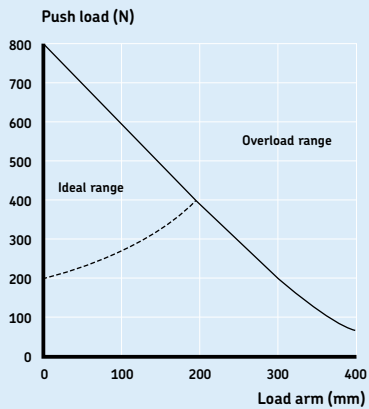

Dynamic stress diagram on X axis with maximum lift\*

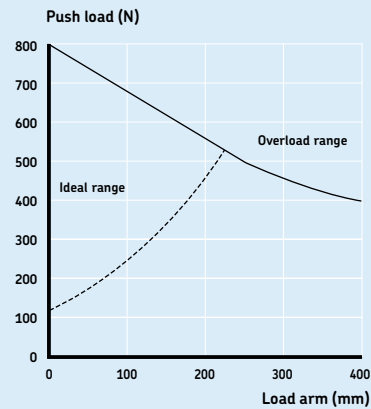

Dynamic stress diagram on Y axis with maximum lift\*

\* The values given apply to single lifting pillars. With a stable table structure the ideal field of use can be enlarged.

## Ordering key

TMD 10 - 00    - 70000

## Type

## Color:

Natural anodized coating

Black anodized coating

5

6

## Options:

With flange for crossbar one side

With flange for crossbar two sides

No flange for crossbar

EWY

2CM

2CN

## Accessories

	Designation	Order N°
Cable 1,0 m with DIN8–plug	ZKA–306355–1000	M/0121741
Cable 1,5 m with DIN8–plug	ZKA–306355–1500	M/0121726
Cable 2,5 m with DIN8–plug	ZKA–306355–2500	M/0121742

© SKF is a registered trademark of the SKF Group

© SKF Group 2010

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

Printed in Sweden on environmentally friendly paper.

PUB L5322,1692 EN · September 2010

