

SKF Food Grade Lubricants

General purpose grease


LGFG 2

SKF LGFG 2 is a high performance food grade grease using complex calcium sulphonate thickener technology and a white mineral oil. It is suitable for applications subjected to high loads, wet environment and fluctuating temperatures encountered in the among others food and beverage industry.

- Wide temperature range
- Outstanding water resistance and corrosion protection
- Excellent mechanical stability
- Great dispensability in single point automatic lubricators
- Excellent protection against high loads and wear
- NSF ISO 21469 registered as well as Halal and Kosher certified

Applications

- Conveyor bearings
- Wrapping machines
- Bottling machines

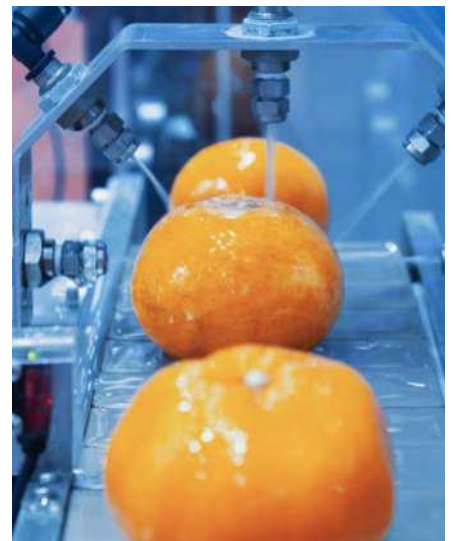

Available pack sizes

Packsize	Designation	Packsize	Designation
420 ml cartridge	LGFG 2/0.4	Electro-mechanical lubricators	
1 kg can	LGFG 2/1	TLSD series 125 ml	TLSD 125/FG2
18 kg pail	LGFG 2/18	TLSD series 125 ml refill	LGFG 2/SD125
180 kg drum	LGFG 2/180	TLSD series 250 ml	TLSD 250/FG2
Gas driven lubricators		TLSD series 250 ml refill	LGFG 2/SD250
LAGD series 60 ml	LAGD 60/FG2	Electro-mechanical lubricant dispensers	
LAGD series 125 ml	LAGD 125/FG2	TLMR 101 series 380 ml refill	LGFG 2/MR380B
		TLMR 201 series 380 ml refill (excl. battery)	LGFG 2/MR380




Technical data

Designation	LGFG 2/(pack size)		
DIN 51825	KP2N-30	Corrosion protection	
NLGI consistency class	2	Emcor: – standard ISO 11007	0–0
Thickener	Calcium sulphonate complex	– salt water test (0.5% NaCl)	0–0
Colour	Brown	– water wash out	0–0
Base oil type	White mineral	Water resistance	
Operating temperature range	–30 to +140 °C (–22 to +285 °F)	DIN 51807/1, 3 hrs at 90 °C	1 max.
Dropping point, DIN ISO 2176	280 °C min. (536 °F min.)	Oil separation	
Base oil viscosity		DIN 51817, 7 days at 40 °C, %	1–5
40 °C, mm ² /s	150	Lubrication ability	
100 °C, mm ² /s	16	R2F, running test B at 120 °C (248 °F)	Pass
Penetration DIN ISO 2137		Copper corrosion	
60 strokes	265–295	DIN 51811 at 100 °C (210 °F)	1 max.
100 000 strokes	+50 max.	Rolling bearing grease life	
Mechanical stability		R0F test L ₅₀ life at 10 000 r/min., hrs	1 000 min. at 120 °C (248 °F)
Roll stability, 50h at 80 °C, 10–1 mm	+50 max.	EP performances	
		DIN 51350/5, wear scar, 1 400 N, mm	1 max.
		DIN 51350/4, 4-ball test, welding load, N	>4 000 min.
		Shelf life	
			2 years
		NSF Reg. No.	
			164513

These characteristics represent typical values.

Lubrication management

Just as asset management takes maintenance to a higher level, a lubrication management approach allows lubrication to be seen from a wider point of view. This approach helps to effectively increase machine reliability at a lower overall cost.

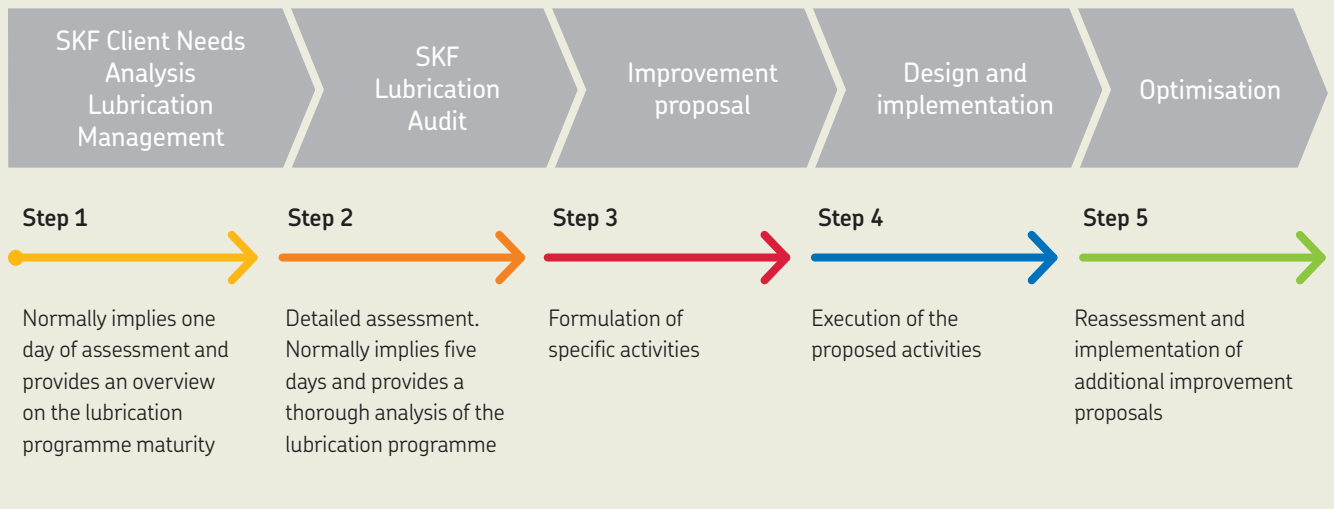

skf.com | skf.com/lubrication | skf.com/mapro

© SKF is a registered trademark of the SKF Group.

© SKF Group 2022

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 19276/2 EN · May 2022

Certain image(s) used under license from Shutterstock.com.