


R06-R

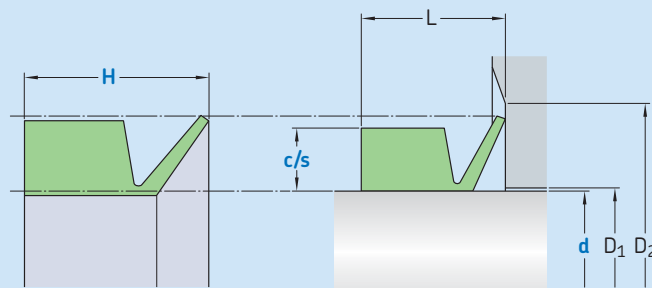

Ordering dimensions in **blue**

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2,5 \mu\text{m}$	$0,1-0,5 \mu\text{m}$
Bottom of groove	$\leq 6,3 \mu\text{m}$	$\leq 1,6 \mu\text{m}$
Groove face	$\leq 15 \mu\text{m}$	$\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$, based on $C_{ref} = 0\%$

Standard dimensions

d	h11	D_1	D_2	c/s	H	L
over	incl.	max	min			
mm						
5	40	$d + 2,0$	$d + 12$	4	7,5	6
40	70	$d + 2,5$	$d + 15$	5	9	7
70	100	$d + 3,0$	$d + 18$	6	10,85	9
100	150	$d + 3,5$	$d + 21$	7	12,7	10,5
150	210	$d + 4,0$	$d + 24$	8	14,6	12
210	300	$d + 5,0$	$d + 30$	10	17,56	14,5
300	450	$d + 6,25$	$d + 36,5$	12,5	21,26	17,5
450		$d + 7,5$	$d + 45$	15	25	20

Ordering example

Profile
d x c/s x H [mm]
Sealing material

Rotary seal R06-R
100 x 7 x 12,7
SKF Ecorubber-1

Operating parameters

Material Seal	Temperature		Speed ¹⁾²⁾	Pressure
	from	to	max	max
–	°C		m/s	bar (MPa)
■ SKF Ecoflas	–10	+200	25	–
■ SKF Ecorubber-H	–25	+150		
■ SKF Ecorubber-1	–30	+100		
■ SKF Ecorubber-2	–20	+200		
■ SKF Ecorubber-3	–50	+150		

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ For speeds above 10 m/s, axial support is recommended.