


K01-P

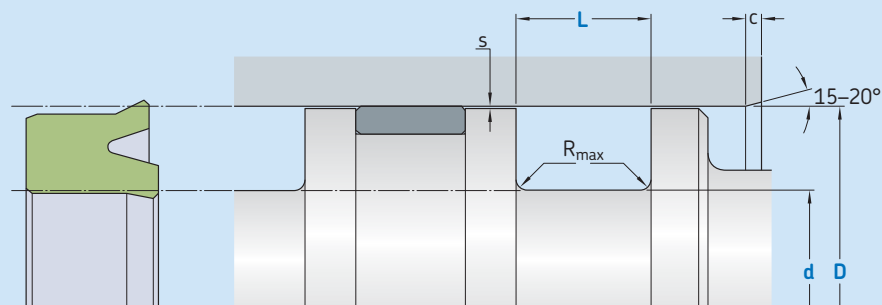

Ordering dimensions in **blue**

Surface roughness	R_{tmax}	R_a
Sliding surface	$\leq 2,5 \mu\text{m}$	$0,05\text{--}0,2 \mu\text{m}$
Bottom of groove	$\leq 6,3 \mu\text{m}$	$\leq 1,6 \mu\text{m}$
Groove face	$\leq 15 \mu\text{m}$	$\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$, based on $C_{ref} = 0\%$

Standard dimensions						Maximal radial extrusion gap			
D	d	L	R_{max}	c	s^*				
H9	h10	+ 0,2				20 bar	100 bar	200 bar	400 bar
over	incl.								
mm						mm			
13	25	D – 8	6,0	0,4	3,5	0,33	0,18	0,11	0,05
25	50	D – 10	7,0	0,4	4,0	0,37	0,22	0,16	0,10
50	75	D – 12	8,0	0,4	4,5	0,42	0,27	0,20	0,14
75	150	D – 15	10,0	0,4	5,0	0,46	0,31	0,25	0,19
150	300	D – 20	12,0	0,4	6,0	0,54	0,39	0,32	0,26
300	500	D – 25	18,0	0,4	8,5	0,61	0,46	0,39	0,33
500	750	D – 30	20,0	0,4	10,0	0,67	0,52	0,45	0,39
750		D – 40	26,0	0,4	13,0	0,67	0,52	0,45	0,39

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

Ordering example

Profile
D x d x L [mm]
Sealing material

Piston seal K01-P
100 x 85 x 10
ECOPUR

Operating parameters

Material Seal	Temperature		Speed ¹⁾	Pressure ²⁾
	from	to	max	max
–	°C		m/s	bar (MPa)
■ ECOPUR	–30			
■ ECOPUR LD	–35			
■ G-ECOPUR	–30	+110	0,5	400 (40)
■ H-ECOPUR	–20			
■ S-ECOPUR	–20		0,7	
■ T-ECOPUR	–50		0,5	

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.