


# S09-E

## F-Slide

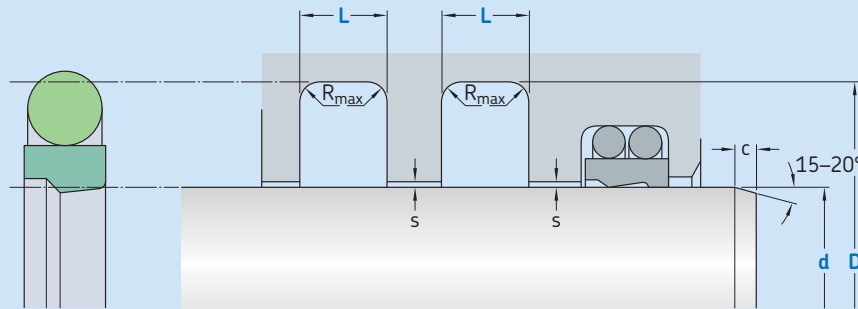

Ordering dimensions in **blue**

| Surface roughness       | $R_{tmax}$       | $R_a$            |
|-------------------------|------------------|------------------|
| <b>Sliding surface</b>  | $\leq 2,5 \mu m$ | $0,05-0,2 \mu m$ |
| <b>Bottom of groove</b> | $\leq 6,3 \mu m$ | $\leq 1,6 \mu m$ |
| <b>Groove face</b>      | $\leq 15 \mu m$  | $\leq 3 \mu m$   |

Bearing area: 50–95% and a cutting depth of  $0,5 R_z$ , based on  $C_{ref} = 0\%$

| Standard dimensions |              |            |           |     |      |         | Maximal radial extrusion gap |         |         |      |
|---------------------|--------------|------------|-----------|-----|------|---------|------------------------------|---------|---------|------|
| d                   | D            | L          | $R_{max}$ | c   | OD   | $s^*$   |                              |         |         |      |
| f8                  | H10          | +0,2       |           |     |      | 100 bar | 200 bar                      | 400 bar | 600 bar |      |
| over                | incl.        |            |           |     |      | mm      |                              |         |         |      |
| mm                  |              |            |           |     |      | mm      |                              |         |         |      |
| <b>4</b>            | <b>8</b>     | $d + 4,9$  | 2,2       | 0,4 | 2,5  | 1,78    | 0,30                         | 0,20    | 0,15    | 0,05 |
| <b>8</b>            | <b>19</b>    | $d + 7,3$  | 3,2       | 0,6 | 3,5  | 2,62    | 0,40                         | 0,25    | 0,15    | 0,05 |
| <b>19</b>           | <b>38</b>    | $d + 10,7$ | 4,2       | 1,0 | 4,5  | 3,53    | 0,40                         | 0,25    | 0,20    | 0,10 |
| <b>38</b>           | <b>200</b>   | $d + 15,1$ | 6,3       | 1,3 | 5,0  | 5,33    | 0,50                         | 0,30    | 0,20    | 0,10 |
| <b>200</b>          | <b>256</b>   | $d + 20,5$ | 8,1       | 1,8 | 6,0  | 7,00    | 0,60                         | 0,35    | 0,25    | 0,15 |
| <b>256</b>          | <b>650</b>   | $d + 24,0$ | 8,1       | 1,8 | 8,0  | 7,00    | 0,60                         | 0,35    | 0,25    | 0,15 |
| <b>650</b>          | <b>1 000</b> | $d + 27,3$ | 9,5       | 2,5 | 10,0 | 8,40    | 0,70                         | 0,50    | 0,30    | 0,20 |
| <b>1 000</b>        | <b>2 000</b> | $d + 38,0$ | 13,8      | 3,0 | 12,0 | 12,00   | 1,00                         | 0,70    | 0,60    | 0,30 |

\* Extrusion gap values shown above are valid for a temperature of 80 °C, higher temperatures require lower values.

### Ordering example

Profile  
d x D x L [mm]  
Sealing material / Energizer

F-Slide S09-E  
100 x 115,1 x 6,3  
SKF Ecoflon 3 / NBR70

## Operating parameters

| Material<br>Glide ring | Energiizer | Temperature |      | Speed <sup>1)</sup> | Pressure <sup>2)</sup> |
|------------------------|------------|-------------|------|---------------------|------------------------|
|                        |            | from        | to   | max                 | max                    |
| –                      |            | °C          |      | m/s                 | bar (MPa)              |
| ■ SKF Ecoflon 2        | NBR70      | –30         | +100 | 10                  | 600 (60)               |
| ■ SKF Ecoflon 3        |            |             |      |                     |                        |
| ■ SKF Ecoflon 4        | FPM75      | –20         | +200 |                     |                        |

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

<sup>1)</sup> Surface speed limit values are valid only in the presence of a lubrication film.

<sup>2)</sup> Pressure ratings depend on the size of the extrusion gap.